



ltem #:	_ Qty #:
Model #:	
Project #:	



#### **FEATURES:**

Brackets can be positioned to accommodate wall studs. Furnished with a 1-5/8" Bullnose edge with a 1-1/2" turn-up edge at rear. Ends are turned down square.

## **CONSTRUCTION:**

Secured to wall by means of bolts through support brackets. Units 7 ft. and larger are furnished with 3 brackets.

### **MATERIAL:**

**16 Gauge Series -** 304 stainless steel polished to a satin finish. **18 Gauge Series -** 430 stainless steel polished to a satin finish.

10" Wide			12" Wide		15" Wide		18" Wide						
L	16 Ga.	18 Ga.	Approx. Wt.	Approx. Cu. Ft.									
24"	WS-10-24-16	WS-10-24	8 lbs.	WS-12-24-16	WS-12-24	9 lbs.	WS-15-24-16	WS-15-24	11 lbs.	WS-18-24-16	WS-18-24	14 lbs.	3
36"	WS-10-36-16	WS-10-36	10 lbs.	WS-12-36-16	WS-12-36	12 lbs.	WS-15-36-16	WS-15-36	15 lbs.	WS-18-36-16	WS-18-36	21 lbs.	4
48"	WS-10-48-16	WS-10-48	12 lbs.	WS-12-48-16	WS-12-48	14 lbs.	WS-15-48-16	WS-15-48	18 lbs.	WS-18-48-16	WS-18-48	24 lbs.	5
60"	WS-10-60-16	WS-10-60	15 lbs.	WS-12-60-16	WS-12-60	17 lbs.	WS-15-60-16	WS-15-60	23 lbs.	WS-18-60-16	WS-18-60	28 lbs.	6
72"	WS-10-72-16	WS-10-72	17 lbs.	WS-12-72-16	WS-12-72	21 lbs.	WS-15-72-16	WS-15-72	28 lbs.	WS-18-72-16	WS-18-72	32 lbs.	7
84"	WS-10-84-16	WS-10-84	20 lbs.	WS-12-84-16	WS-12-84	25 lbs.	WS-15-84-16	WS-15-84	32 lbs.	WS-18-84-16	WS-18-84	36 lbs.	8
96"	WS-10-96-16	WS-10-96	23 lbs.	WS-12-96-16	WS-12-96	28 lbs.	WS-15-96-16	WS-15-96	36 lbs.	WS-18-96-16	WS-18-96	42 lbs.	10
108"	WS-10-108-16	WS-10-108	28 lbs.	WS-12-108-16	WS-12-108	32 lbs.	WS-15-108-16	WS-15-108	40 lbs.	WS-18-108-16	WS-18-108	48 lbs.	11
120"	WS-10-120-16	WS-10-120	32 lbs.	WS-12-120-16	WS-12-120	36 lbs.	WS-15-120-16	WS-15-120	44 lbs.	WS-18-120-16	WS-18-120	54 lbs.	12
132"	WS-10-132-16	WS-10-132	36 lbs.	WS-12-132-16	WS-12-132	42 lbs.	WS-15-132-16	WS-15-132	49 lbs.	WS-18-132-16	WS-18-132	60 lbs.	13
144"	WS-10-144-16	WS-10-144	40 lbs.	WS-12-144-16	WS-12-144	48 lbs.	WS-15-144-16	WS-15-144	55 lbs.	WS-18-144-16	WS-18-144	66 lbs.	14



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.


For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933


TOL ± .500" ALL DIMENSIONS ARE TYPICAL

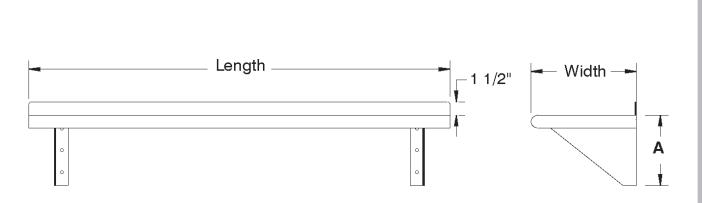

Width	Α
10"	8 1/2"
12"	10 1/2"
15"	13 1/2"
18"	16 1/2"

# **Wall Shelf Options**

	•
PRT-1	Printer Shelf
TA-22A	Square Edge Shelf
TA-26	Welded Shelf Brackets
TA-49	Wall Shelf 2" Offset
TA-71	Heat Lamp Provision
TA-77	Check Minder
TA-77A	
TA-99A	
TA-100A	Bullnose Edge On All 4 Sides of Shelf
TA-102	6" Cantilever Shelf Offset
TA-49 Wall Shelf 2"-	( ) ( ) ( ) ( ) ( ) ( ) ( ) ( ) ( ) ( )





#### Requirements for NSF Installations

- 1. Install at least 60" above floor.
- 2. Limit to dry storage.
- mount units side by side and seal joints with an approved sealant.

