



MECHANICALLY ASSISTED REFRIGERATED COLD PAN TABLES WITH ENCLOSED BASE AND SLIDING DOORS



Item #: _____ Qty #: _____
Model #: _____
Project #: _____

NOTE: Units are not designed to cool foods originally warm. Food should already be chilled to maintain the proper temperatures

MACP-4-DR Shown

FEATURES:

High nominal cooling capacity for consistent product temperature control
Aluminum encased copper tube evaporator panels improve heat transfer by increasing contact area. This increases operating efficiency and reduces power consumption
Expansion valve for efficient operation at various temperature conditions
Refrigerant filter drier to insure cleanliness of sealed refrigeration circuit
Sight glass to insure a properly charged refrigeration system
Liquid receiver for improved refrigerant charge control
Low running current suitable for any 115 volt circuit
Precision electronic thermostat for exact temperature control
Two stainless steel sliding doors
Stainless steel shelf with removable 3/8" thick poly cutting board - Ships K.D.

MATERIAL:

TOP: 18 gauge #304 stainless steel welded open frame
LINER: Constructed of 18 gauge, 304 stainless steel, one piece construction, all welded, ground and polished to a uniform finish. All corners are covered with a 1/4" radius.

CABINET BASE: 20 gauge #304 stainless steel

PLUMBING: 1" I.P.S. drain

REFRIGERATION SYSTEM: The compressor is housed in a 16 gauge galvanized under structure, fabricated from formed angles and bolted to the galvanized jacket. The fully self contained condensing unit is provided with a hermetically sealed compressor with a digital, programmable thermostat. The system is fully charged with environmentally friendly R404-A refrigerant.

LEGS: 18 gauge #302 stainless steel with fully adjustable non-marking tip plastic bullet foot

CUTTING BOARD: White Thermoplastic

CUTTING BOARD BRACKETS: 16 gauge #302 stainless steel

ELECTRICAL:

Unit will be wired for 15 amps, 120V single phase operation with an on/off thermostat switch

MACP-3-DR: 115 V, 8 AMPS, 60 Hz, 1/5 HP

MACP-4-DR & MACP-5-DR: 115 V, 8 AMPS, 60 Hz, 1/3 HP

Includes 6 ft. long, 3 wire cord with a NEMA 5-15P plug



**SU-P-234 - 6' with
NEMA 5-15 plug Included**

Model	Length (L)	Width	Opening Size (A x B)	Drain Distance (C)	Refrigerant	Wt (lbs.)	Cu. Ft.
MACP-3-DR	47-1/8"	30-3/4"	42-5/8" x 20"	41.6875"	R404-A	385	36
MACP-4-DR	62-1/2"	30-3/4"	57-15/16" x 20"	57"	R404-A	420	46
MACP-5-DR	77-3/4"	30-3/4"	73-1/4" x 20"	72.3125"	R404-A	505	56

***Width Includes 8" Cutting Board**

OPTIONAL ACCESSORIES

SU-45A 12" x 1" Adapter Bar

SU-45B 20" x 3" Adapter Bar



WARNING: Refrigerated Equipment on this page may expose you to chemicals, including Ethanes, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info., visit www.p65warnings.ca.gov.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:




Email: smartfab@advancetabco.com or Fax: 631-586-2933

DIMENSIONS and SPECIFICATIONS

TOL $\pm .125"$

ALL DIMENSIONS ARE TYPICAL

SIDE VIEW

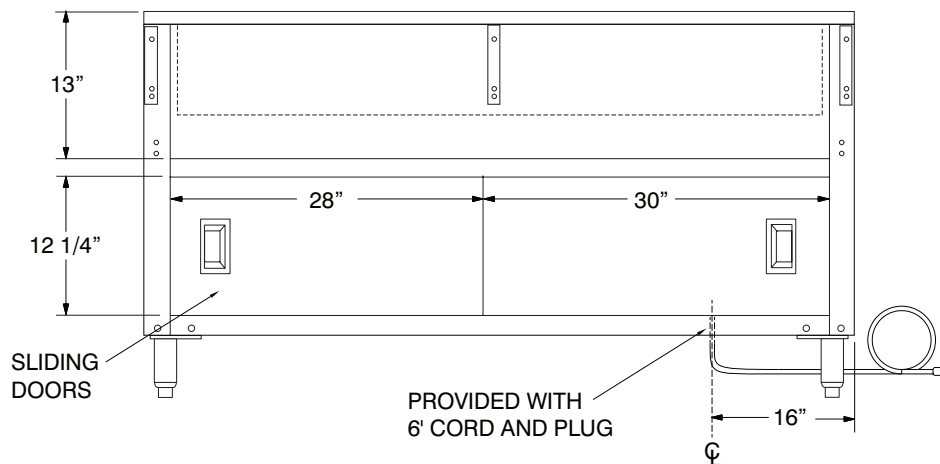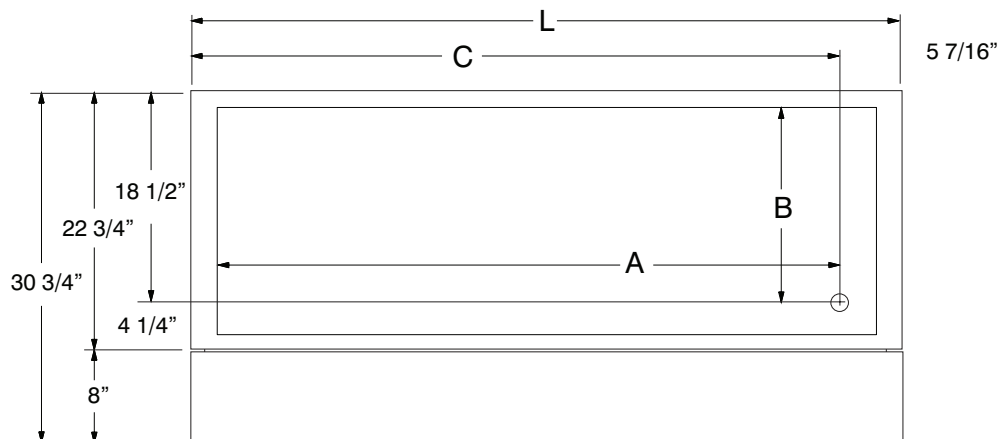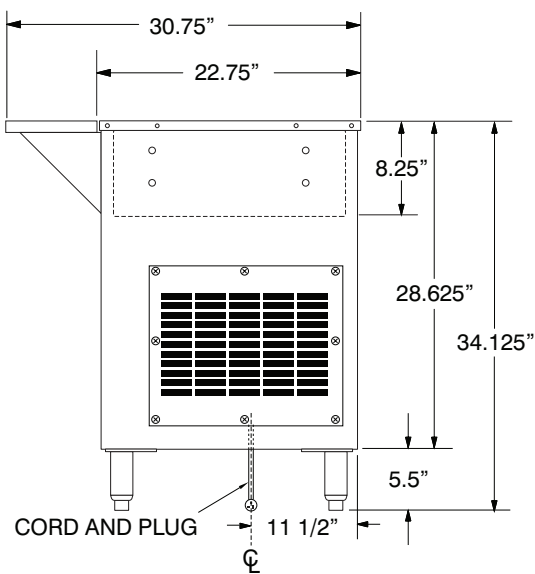

REF-V

200 Heartland Boulevard, Edgewood, NY 11717-8380

ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

© ADVANCE TABCO, JANUARY 2019